

**PPIC**

**POLYMER PRODUCTS CORPORATION**

**V - Flex**



**V - Gaskets**





## V - Flex

**V-Flex** an “Elastomer pipe insulation ” is closed cell, fibre free and hence completely non porous.

**V-Flex** is made from synthetic rubber with closed cells. It is light, extremely flexible and durable insulation for liquid cooling and heatings lines.



**V-Flex** is designed to give a fine cellular structure, good thermal efficiency, thus providing excellent insulation and condensation control  
Temperature Range :  
-57°C (70°F) to +125°C(275°F)

**V-Flex** is available in popular sizes ranging from nominal wall thickness of 3/8” to 1 ½”




### INTRODUCTION

Polymer Products Corporation is a member of



“ **The Product Group of Compaines** ” involved in multifarious operations ranging from Rubber, Plastics, Chemicals, Alumnum, Glass and catering to the most demanding applications.

Our products are manufactured on a fully automated and modern plant, ensuring repeated quality and standards.

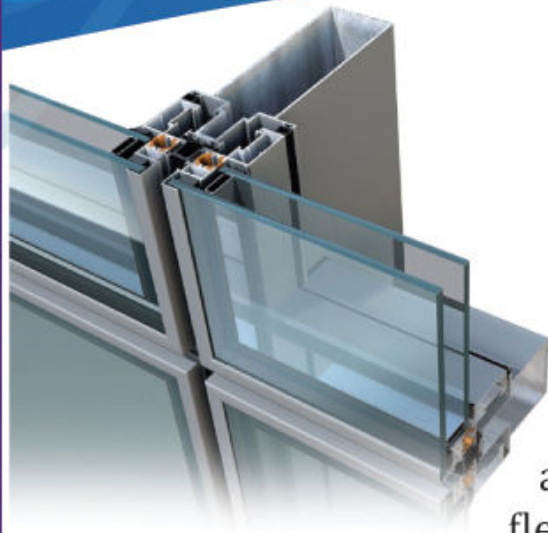

## V - Gaskets

EPDM is found in a wide range of applications and is excellent for outdoor use. It maintains its flexibility at low temperatures, and is well known for its resistance against ozone, weathering and ageing. EPDM is also water and steam resistant.

PPC is fully equipped to cater to all the Gaskets Profiles required by Doors, Windows or customized high rise Curtain walls.

PPC also manufactures weather strips for Auto Industry, may it be solid or cellular Sponge profiles.

### PHYSICAL PROPERTIES

Description	RESULTS
Hardness Range (Shore A)	25° - 90°
Physical Strength	Good
Compression Set	Good
Tear & Abrasion Resistance	Good
Resilience	Very Good
Permeability to Gases	Very low
Ozone and UV Resistance	Excellent
Electrical Strength	Excellent



**(A Member of the Product Group of Companies)**

---

PLOT NO : 43 / C, 24th EAST STREET, PHASE - 1, DHA, KARACHI, PAKISTAN

Tel: (+92-21) 35899701, 35899702, 35899703, 35899704, 35899705, 35899706

Fax: (+92-21) 35899709

E-mail: [info@theproductgroup.com](mailto:info@theproductgroup.com)

Web: [www.theproductgroup.com](http://www.theproductgroup.com)